

**KIT FOR RECESSED MACHFLOW STAINLESS STEEL
AISI 304 BRIGHT FINISH**



Code: **KT009C**

General Description

- Kit for recessed machflow® hand dryer (hand dryer not included).
- The kit for recessed machflow® makes the machflow® hand dryer suitable for the compliance of the ADAAG norm (US) – that limits to 4" the horizontal projection of the devices installed in bathrooms for public use –, bestowing on that hand dryer the quality of "specific for the disabled".
- Maximum robustness and vandal-proofness.
- Excellent integration and aesthetical level.

Components & Materials

- Electro-zincd iron cabinet, 1/16" (1,5 mm.) thick, with 16 screw holes of Ø 15/64" (6 mm.) for mounting on the wall, it includes 4 M5 bolts welded on top of the base plate for the fitting of the Machflow ® hand dryer.
- Black rubber seal, offer a reinforcing outside protection that minimizes vibrations and noise.
- Stainless steel AISI 304 frame, 1/16" (1,5 mm.), bright finish, with 4 screw holes of Ø 23/64" (9 mm.) for mounting on the wall.
- Nuts and bolts for the fitting of the dryer to the kit and the frame to the wall included: 4 nuts DIN 934 M5, 4 washers DIN 125 M5 and 4 rubber silent blocks.
NOTE: the screws and wall plugs for the mounting of the cabinet to the wall are not included. The use of stainless steel screws is recommended.
- Cabinet size: 21" 21/32 x 12" 31/32 x 2" 31/32 (550 x 330 x 76 mm.)
- Frame size: 23" 13/32 x 14" 25/32 x 1/16" (595 x 375 x 1,5 mm.)
- Outer projection from the wall: 3" 13/16 (97 mm.)
- Projection inside the wall: 3" 1/16 (78 mm.)

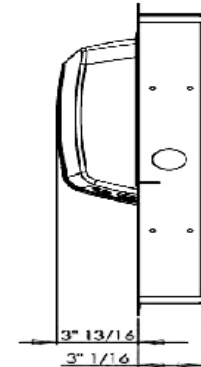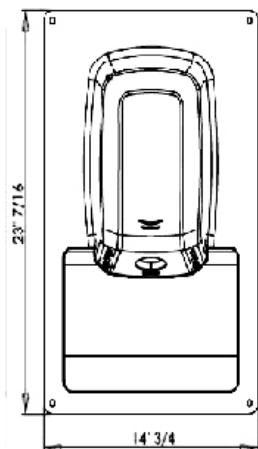

Dim ± 4%

Operation

No specific instructions for its use required.

Certificates & Qualifications

ISO 9001:2008. Complies with ADA requirements.

Medclinic, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

Revision 09-2012

© medclinic S.A.

